


Windrispenband BAN

- Rolle á 50 mtr.
- Befestigung: CNA Kammnägel 4,0 / CSA Schrauben 5,0
- Löcher: Ø 5 mm
- Stärke: 2,0 mm


Art.-Nr.	A mm	ME
123798	40	Stk.

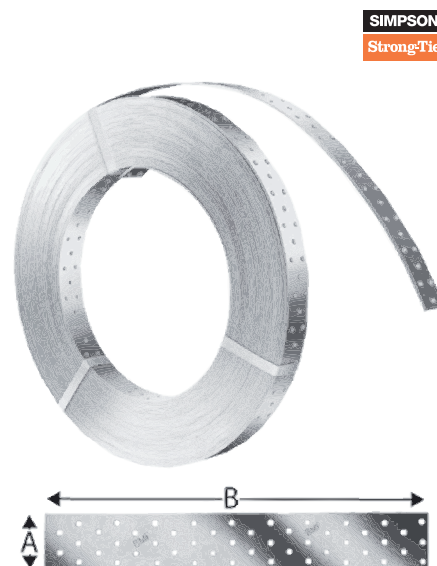

Lochbleche NP

- Befestigung: CNA Kammnägel 4,0 / CSA Schrauben 5,0
- Löcher: Ø 5 mm


Art.-Nr.	A mm	B mm	Stärke mm	ME
212828	60	140	1,5	Stk.
119680	100	200	2,0	Stk.
119599	80	200	2,0	Stk.
119587	80	240	2,0	Stk.

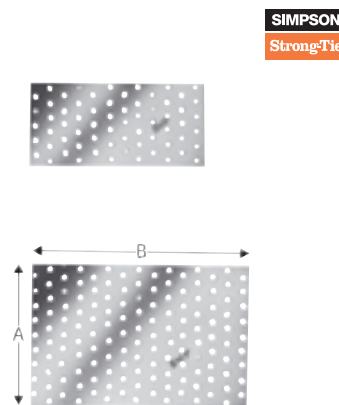

Flachverbinder

- Verzinkt
- Löcher: Ø 5/11 mm

Art.-Nr.	Abmessung mm	Lochzahl mm	ME
120298	95 x 40 x 2,5	8/2	Stk.
120299	135 x 55 x 2,0	16/2	Stk.
120292	175 x 40 x 3,0	18/4	Stk.

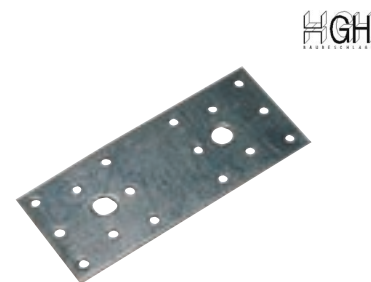

Stabdübel DIN 1052

- Verzinkt
- Beidseitig gefast

Art.-Nr.	Ø x Länge mm	ME
120967	8 x 140	Stk.
122611	12 x 80	Stk.
122629	12 x 120	Stk.
122591	12 x 140	Stk.



Passende Ankernägel finden Sie auf Seite 560